


## IPC-I1151P03-02 Desktop Motherboard

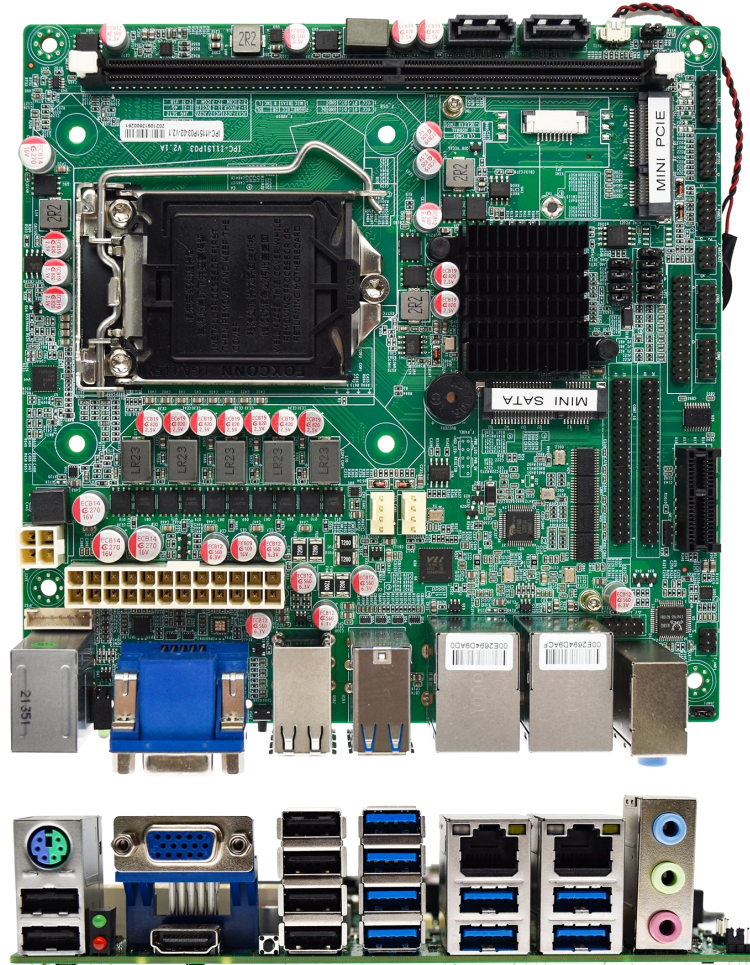

### Features

- Intel LGA1151 6<sup>th</sup> and 7<sup>th</sup> generation platform
- Standard industrial MINI-ITX board (170MM\*170MM)
- VGA1, HDMI, synchronous/asynchronous
- Support DDR4memory (Maximum 16GB)
- Support 10 COM port Support 14 USB port (6\*USB2.0+8\*USB3.0)
- Onboard 1 MSATA , 2SATA3.0, Onboard 1 MINIPCI-E

### Application

Industrial Automation、Rail Transportation、Financial Equipment、Medical Social Security、MINIBOX、Interactive Applications、All-in-one Computer etc.



# Fodenn Electronic Technology Co.,Ltd

Add: 3rd floor, Building B, Runchang industrial park, Zhonghao 2 road,  
Bantian street, Longgang district, Shenzhen

Tel: 0755-86329789 Fax: 0755-83689236 Email: oversea1@fodenn.com

## Specifications

<b>Processor</b>	<b>CPU</b>	<b>Intel Skylake/Kabylake i3/i5/i7 processor</b>
	Socket Type	LGA 1151 Socket CPU
	BIOS	AMI EFI 64MBIT
	Chipset	Intel H110
<b>Memory</b>	Slot/Type	1*DIMM DDR4 2133/2400
	Maximum Memory	16GB
<b>Display</b>	GPU	Intel HD Graphics
	Output Port	VGA+HDMI
<b>Audio</b>	ALC 662	1*LINE-OUT, 1*MICIN, 1*LINE-IN, support amplifier
<b>Network Card</b>	RTL 8111E Gigabit LAN	2*RJ45
<b>Other Functions</b>	Watchdog	256 levels, programmable 0-255 seconds / min
<b>Rear I/O Port</b>	Display Port	VGA+HDMI
	LAN Port	2*RJ45 Gigabit
	USB Port	8*USB3.0, 6*USB2.0 Port Adopt 3rd party VL805 PCIE to USB3.0 solution
	Audio Port	1*LINE-OUT,1*MIC N, 1*LINE-IN
	PS/2 Port	1*PS/2 two in one
<b>Expandable Port</b>	PCIE Slot	1*PCIEX1
	LPT Pin	1*LPT Pin
	MINI-PCIE	1* MINI-PCIE expandable 3G/WIFI /4G 1*MSATA
	COM Pin	2-10*COM Pin , Standard 9PIN RS232,COM2 supports RS422/RS485,COM1/2 supports 5V and 12V
<b>Storage</b>	SATA Port	2*SATA3.0, 1*MSATA
<b>Physical parameters</b>		
<b>Operating System</b>	WIN7,WIN8, WIN8.1, LINUX, Unix	
<b>Dimensions</b>	170MMX170MM	
<b>Environment</b>	Operating Temperature: 0-60°C	
	Relative Temperature: 0-95%RH	